

EschmannStahlGrade  
**ESAKTUELL**<sup>1200</sup>



Products

# Facts & Figures

## Material

Reference analysis in %						
Material	C	Mn	Cr	Ni	Mo	
ESAKTUELL <sup>1200</sup>	0.25	1.4	1.3	1.0	0.5	+ trace elements
1.2738 EST	0.4	1.5	2.0	1.0	0.25	


## Depiction of Toughness



## Heat Conductivity [W/mK]

Material	20 °C	350 °C	700 °C
ESAKTUELL <sup>1200</sup>	38.0	40.1	40.8
1.2738 EST	35.5	33.2	31.9

At 350 °C: 40.1 W/mK

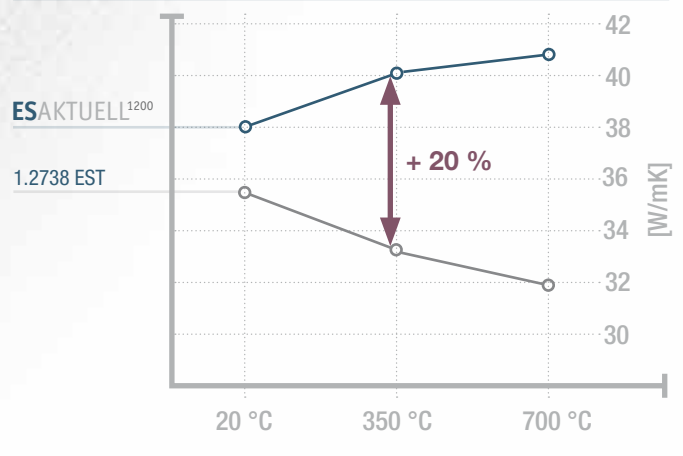


## Heat Treatment Data

Process step	Temperature	Duration	Cooling
Stress relief heat treatment	max. 480 °C	min. 4 h	furnace

## Full Quenching and Tempering

High degree of hardness all the way to the core

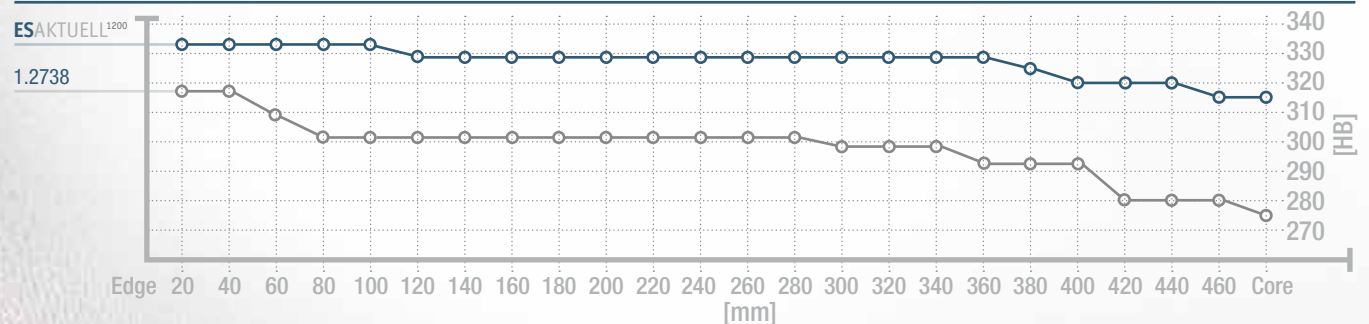



## Greater Reliability and Higher Productivity in Plastics Processing

If optimal graining suitability as well as high production and process reliability are called for, this is when you want to use **ESAKTUELL 1200**. Due to the optimized properties of **ESAKTUELL 1200**, by applying this steel grade you get maximum security and increase the cost-effectiveness of your production.

- High degree of heat conductivity
- Low degree of segregation
- Wear resistance
- Optimal repair weldability
- Good polishability
- Cost-effective machinability

**i** ESAKTUELL<sup>1200</sup> –  
reduced percentage of carbon =  
better repair weldability

“ ESAKTUELL<sup>1200</sup> –

*excellent graining suitability*

*along the entire cross-section!* ”



## Versatile Options

Requirements for ever bigger parts in injection molding at ever shorter cycle times exacts highest demands on the tool steel used for molds. That is why EschmannStahl offers solutions tailored specifically to meet these enhanced requirements and accompanies the customers from tool design to production.


Based on a close cooperation with its subsidiary Eschmann Textures, this kind of operator-oriented advice enables us to tailor all quality-relevant processes, from steel selection to surface design, in line with your individual needs in an ideal way.

For mold users, the good wear resistance also contributes to cost-effectiveness, as it guarantees longer tool life and thus greater number of produced units. The perfect surface quality of tools made of **ESAKTUELL 1200** is the basis for plastic products of a continuously high quality.





Excellent graining suitability guarantees high-quality surfaces.

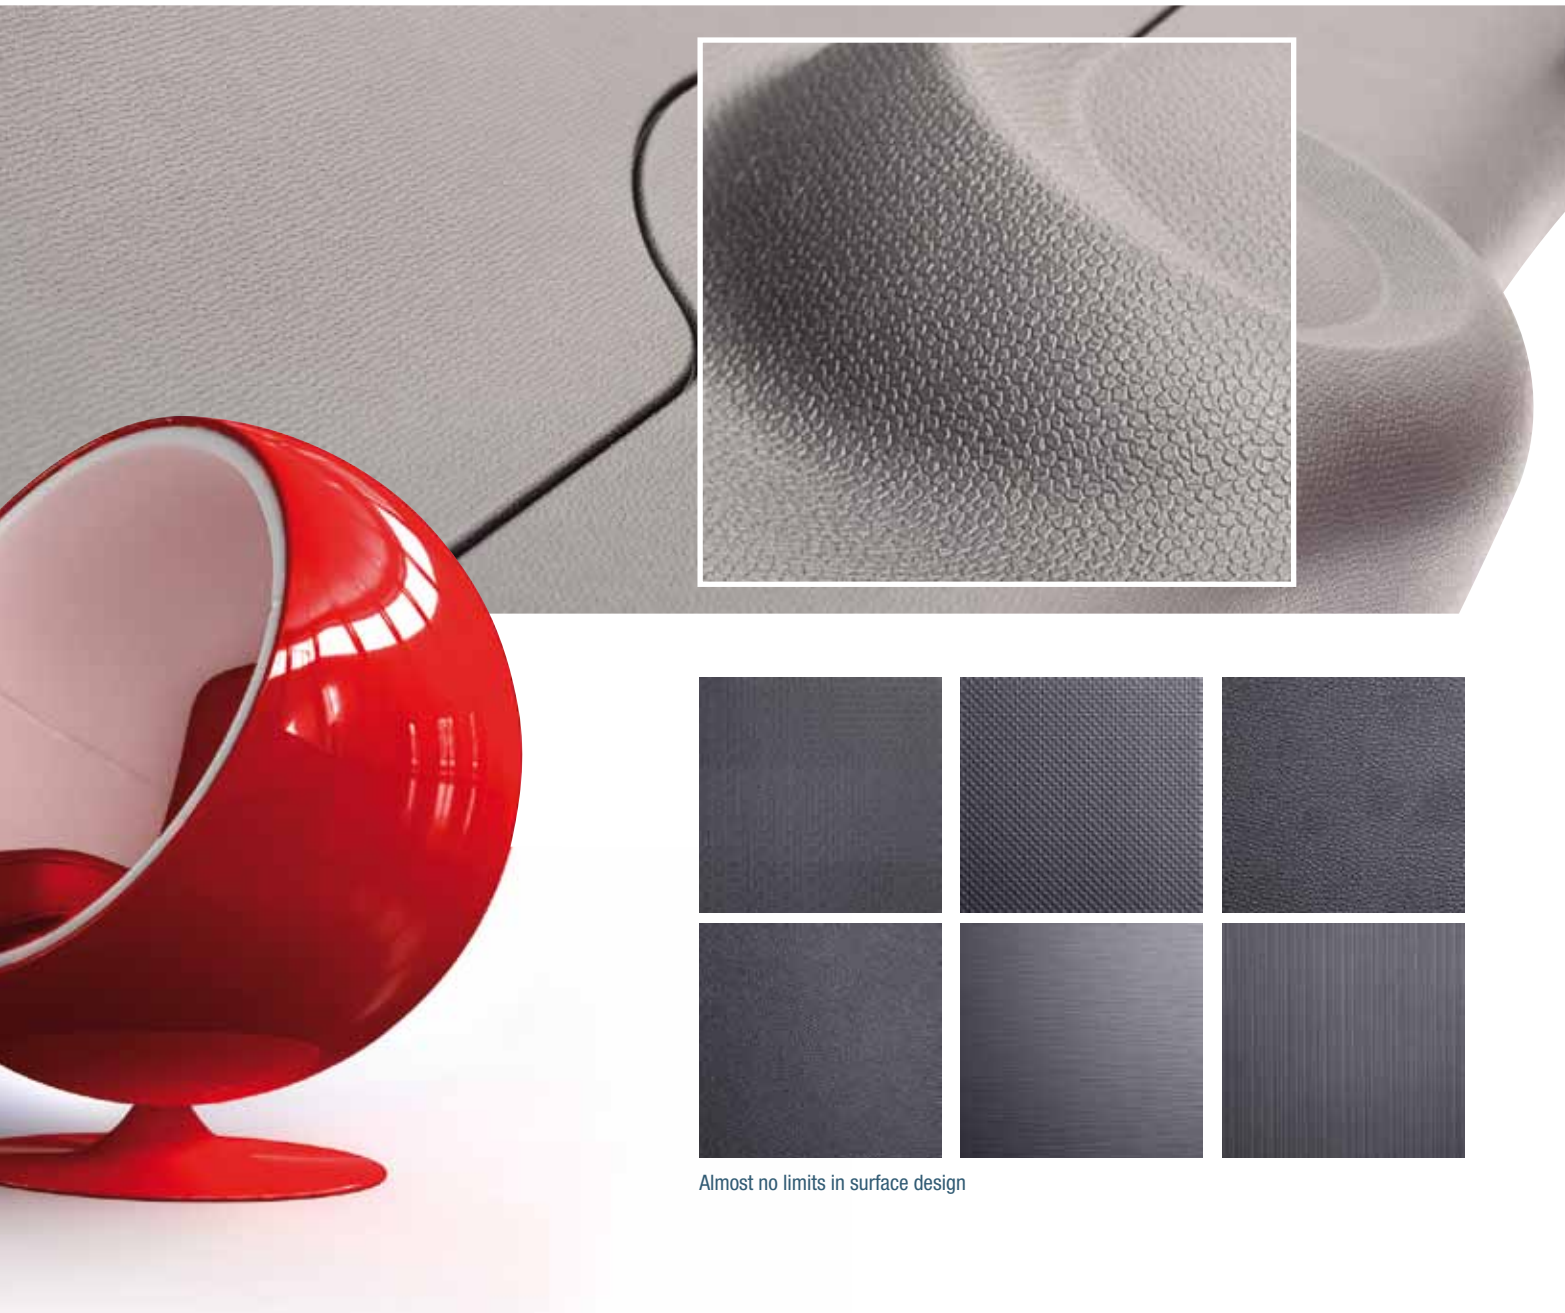

Almost no limits in surface design



### Intersteel (UK)

European Business Park  
Taylors Lane  
Oldbury  
West Midlands  
B69 2BN

Phone: +44 121 627 9279  
Fax: +44 121 627 9270  
E-mail: [sales@intersteel.co.uk](mailto:sales@intersteel.co.uk)

Legal notice: EschmannStahl GmbH & Co. KG has taken greatest care in compiling the information.

It is nevertheless possible that data may have changed in the meantime. EschmannStahl disclaims any liability or warranty regarding the accuracy, actuality, correctness and completeness of the information provided. The information within is to be considered as a reference, which is only binding, when specifically referred to in a completed contract with EschmannStahl GmbH & Co. KG. EschmannStahl GmbH & Co. KG reserves the right to change the information without notification. EschmannStahl GmbH & Co. KG explicitly excludes any responsibility for claims or damages, including consequential losses, arising in connection with the use of the data provided. Previous publications are no longer valid.



ESCHMANNSTAHl